

Parallel board Installation Manual for HTX11 6-10kVA v1.0

Materials list:

1. Parallel board and signal cable

1. Remove the cover, 4 pcs screws on the back of cabinet, 2 screws on both sides of the cabinet, as is shown in figure 1.

Notes:

For standard model (Built-in batteries), there are another screws on the top of cabinet.



Figure 1 Remove cover

2. Remove the plate of intelligent slot, as is shown in figure 2.

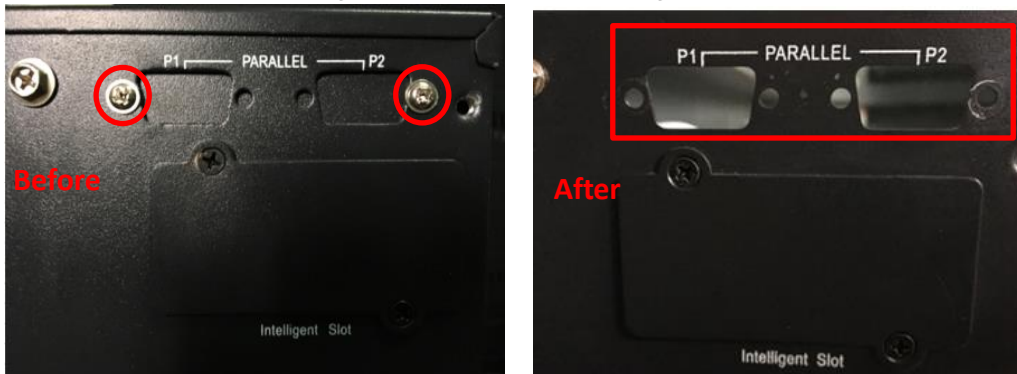


Figure 2 Remove plate of parallel board

3. Remove 4 pcs screws, and install the parallel board to the cabinet, as is shown in figure 3.

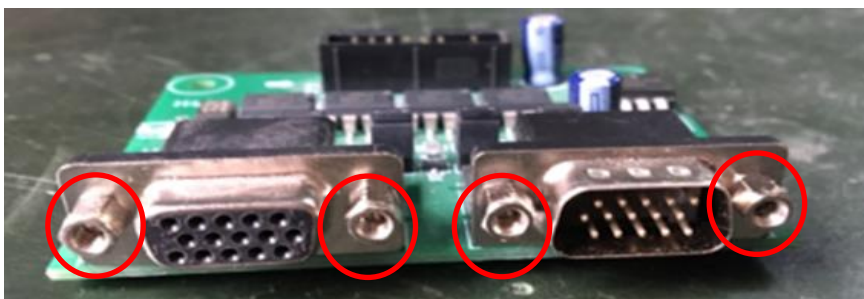
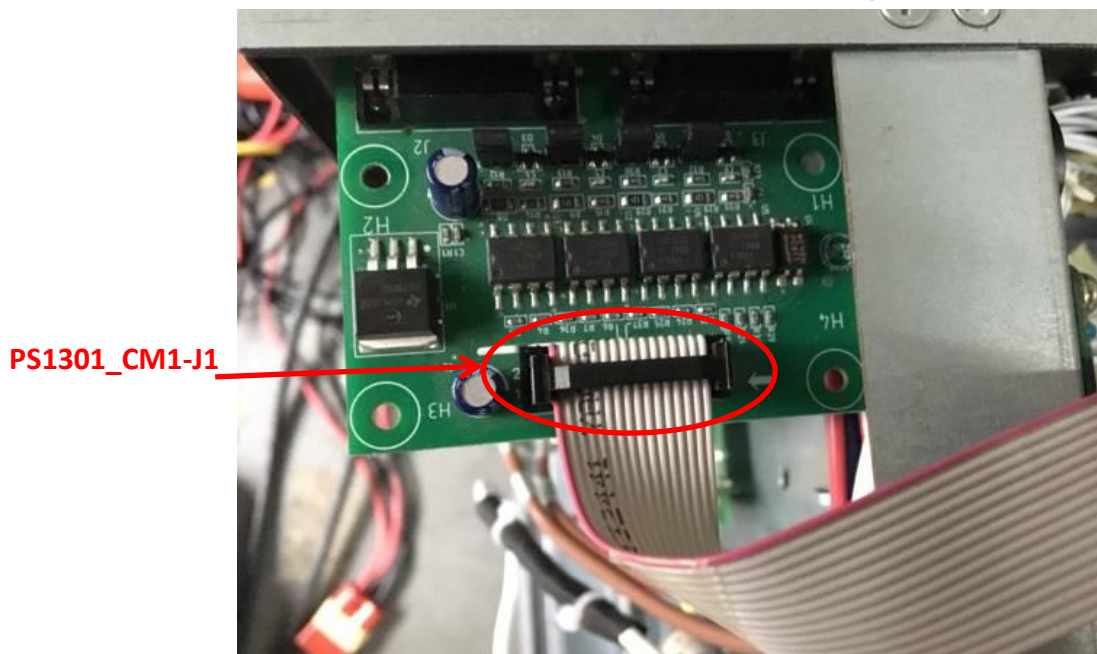




Figure 3 Install parallel board

4. Connect PS1301_CM1-J1 (Parallel board) with PS1509_CT1-J5 (Control board), and fix these terminals with hot-melt adhesive, as is shown in figure 4.



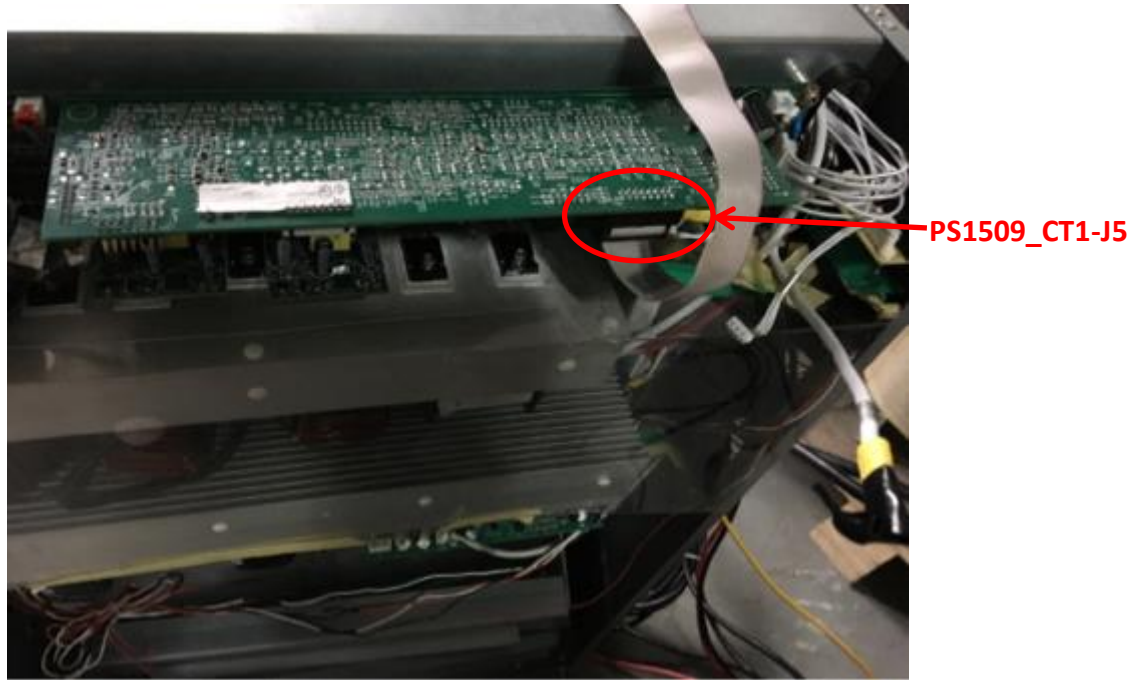


Figure 4 Connect signal cable

5. Install back the cover of UPS.

Note:

For standard model (Built-in batteries), please install top cover first, then others.